



Data Sheet / Tokheim Quantum™ ML LPG Dispenser

Get into a Greener Gear with LPG

Fuel Compatibility

- Liquefied Petroleum Gas (LPG)

Model Availability

- Orientation: Lane, Dual-sided or Single-sided
- Grades available: 1
- Nozzles available: 1 to 2
- Hydraulic system: Remote Pressure
- Hose Management: Light Hose Retraction (LHR)
- Flow Rates available: 5-50 lpm (max 25 bar)

Hose Reach

- LHR: 3.9 meter reach

Electronics

- TQC pump computer

Displays

- Standard 6-6-4 LCD with 1.00" digits
- Premium 7-6-5 LED with 1.15" digits

Totalizers

- Electromechanical 7-digit totalizers

Communication Protocol

- IFSF LON as standard
- Other protocols available

Metering

- GPL700 meter

Branding

- Optional customized graphics

Materials

- Painted hot dipped galvanized steel frame
- Painted hot dipped galvanized steel cladding

Corrosion Protection

- C4 protection according to ISO12944-2: 1998 as standard. Optional C5 protection available

Operating Temperature

- From -25°C to +55°C as standard
- Optional low temperature kit option for extended temperature range -40°C to +60°C

Relative Humidity


- From 5% to 95%

IP Rating

- IP 54 electronic head

Certifications

- ATEX, OIML, MID

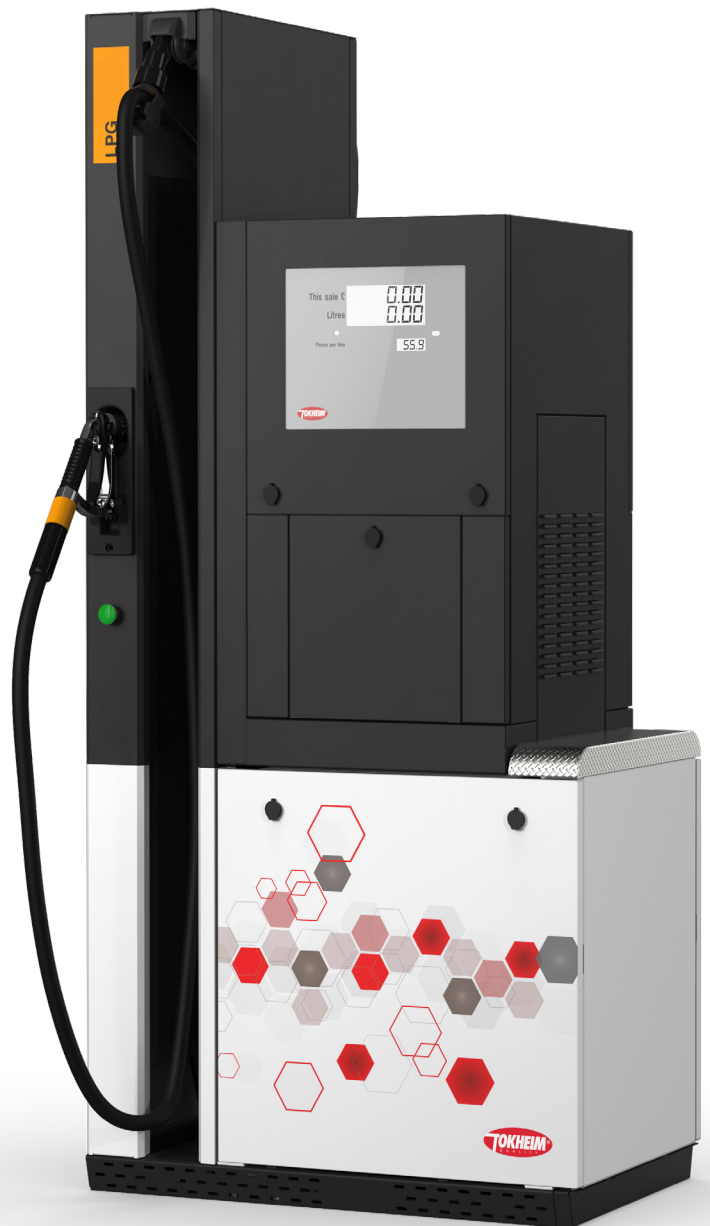

DFS Worldwide Brands



Wayne
FUELING SYSTEMS

OPW
FUEL MANAGEMENT SYSTEMS

ClearView



ProGauge

fairbanks

©2022 Dover Fueling Solutions. All rights reserved. DOVER, the DOVER D Design, DOVER FUELING SOLUTIONS, and other trademarks referenced herein are trademarks of Delaware Capital Formation Inc., Dover Corporation, Dover Fueling Solutions UK, Ltd., and their affiliated entities, registered or claimed in the United States and various other countries. 09-MAY-22